



Graver Technologies

FILTRATION | SEPARATION | PURIFICATION



QCR™ Series Filter Cartridges

*Helping to ensure the safety
of the water supply*

Product Specifications

Media: Polypropylene,
Polyethersulfone (0.8)

Inner core, end caps, cage:
Polypropylene

Gaskets/O-Rings:
Buna-N, EPDM, Silicone, Teflon
Encapsulated Viton, Viton

Micron rating: 0.8, 1.0

End styles: P (DOE), P2 (226/flat),
P3 (222/flat), P7 (226/fin), P8 (222/fin)

Dimensions

Nominal lengths:

5", 9.75", 10", 19.5", 20", 29.25", 30",
39", 40"

(12.7, 24.8, 25.4, 49.5, 50.8, 74.3, 76.2,
99.1, 101.6 cm)

Outside diameter: 2.7" (6.86 cm)

Inside diameter: 1.0" (2.54 cm)

Surface Area: 7.0 ft² (0.65 m²)

Operating Parameters

Maximum operating temperature:
176°F (80°C)

Maximum differential pressure:
75 psid @ 70°F (5.2 bar @ 21°C)
30 psid @ 176°F (2.0 bar @ 80°C)

Maximum reverse pressure:
40 psid @ 70°F (2.8 bar @ 21°C)

Recommended change-out pressure:
35 psid (2.4 bar)



HEALTH DANGERS OF CRYPTOSPORIDIUM

Water borne disease has been traced to Cryptosporidium and Giardia parasites that may be present in many surface water sources. Healthy individuals typically recover from the common gastrointestinal effects, however for individuals with weakened or undeveloped immune systems, it can be life threatening. These naturally occurring organisms are highly resistant to inactivation by conventional water treatment processes such as chlorination and thus require high performance mechanical removal technologies.

In order to ensure the safety of the water supply, standards have been established that define the minimum performance requirements for materials and components of water treatment systems. The QCR Cyst Reduction filter contains an absolute 1 micron filter media designed to provide a minimum log reduction credit of >3.0 for cysts based on the test requirements of the Long term 2 Enhanced Surface Water Treatment Rule (LT2).

FEATURES & BENEFITS

- Constructed of polypropylene or polypropylene and polyethersulfone — compatible with most fluids
- Double O-Ring style ends for the highest seal integrity
- 7.0 ft² (0.65 m²) of effective filter area
- Various O-Ring materials and configurations — easily retrofits most systems
- High surface area — high flow rates and long on-line service

CERTIFICATIONS

- USP Class VI: Meets USP Class VI Biological Test for Plastics
- FDA Listed Materials: All materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, and 177.1520, as applicable for food and beverage contact.
- LT2: Performance tested and verified by independent 3rd party laboratory to comply with Long Term 2 Enhanced Surface Water Treatment Rule for reduction of cysts. Data available upon request.


QCR NOMENCLATURE INFORMATION

Filter Type	Retention Rating (microns)	Nominal Length (inches)	End Configuration	Gasket or O-Ring	Options		
QCR Series	0.8 1	-5	-29.25 ¹	P	Double Open End	B Buna-N	-I Steam Insert
		-9.75 ¹	-30	P2	226/Flat Single Open End	E EPDM	
		-10	-39 ¹	P3	222/Flat Single Open End	S Silicone	
		-19.5 ¹	-40	P7	226/Fin Single Open End	T Teflon encap. Viton (O-Rings only)	
		-20		P8	222/Fin Single Open End	V Viton	
Example: QCR 1-30P7S-I							
QCR	1	-30	P7	S	-I		

¹Available only for DOE (P) configuration

QCR FLOW RATE

Typical Flow Rate Clean Water at Ambient Temperature
(per 10" cartridge)

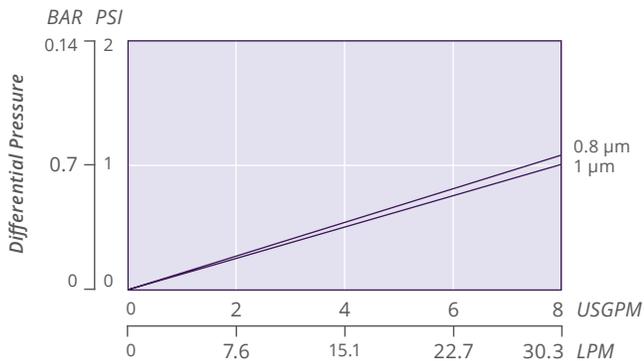

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise

PERFORMANCE SPECIFICATIONS

Sterilization

Cartridges may be autoclaved for 30 minutes at 250°F (121°C) under no end load conditions. Cartridges fitted with steam insert may be steamed for at least 10 30-minute cycles @ 275°F (135°C) not to exceed 3 psid (0.21 bar).

FOR MORE INFORMATION

GTX-285 1-23

DISTRIBUTED BY

Customer Service/Technical Support: 1-888-353-0303

Europe (UK): +44-1424-777791 China: +86-21-5238-6576

Asia: +65-9635-7690

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believe to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. QCR is a trademark of Graver Technologies, LLC.



Graver Technologies | 200 Lake Drive, Glasgow, DE 19702 | 1-302-731-1700 | 800-249-1990

Fax: 1-302-369-0938 | info@gravertech.com | www.gravertech.com

A member of The Marmon Group—A Berkshire Hathaway Company