

AIRGUARD®

MERV 8 Efficiency

Standard Capacity: .21 Initial Resistance (In. W.G.)

High Capacity: .19 Initial Resistance (In. W.G.)

DP® / DP Max

MERV 8 Standard and High-Capacity
Extended Surface Pleated Filters



- Standard and high capacity MERV 8, MERV-A 8-A
- Low Initial Resistance for energy savings
- Extremely high dust-loading
- Quality engineered for consistent production
- Industry's largest Inventory
- Proudly made in the U.S.A.

 Parker

ENGINEERING YOUR SUCCESS.

DP® / DP Max

Extended Surface Pleated Filters

Exceeds ASHRAE Standard 52.2 air cleaning specifications for filters installed upstream of cooling coils.

For over 40 years, Airguard® has been providing the high-performance DP® filter at competitive prices. Using ground-breaking R&D to provide a lower pressure drop and higher dust holding, the DP/DP Max filters are better than ever. And with the largest inventory of pleats in the industry, availability is never an issue. Contact an Airguard representative for a quote today.

Media:

- 100% thermally bonded synthetic, proprietary media resists moisture and damage
- Mechanical efficiency – achieves MERV 8 rating before and after a conditioning step
- Independently tested and verified for quality control
- Extremely low pressure drop and high dust holding capacity

Construction:

- Heavy duty, moisture resistant beverage board frame
- Two-piece frame provides rigidity with double-wall thickness around outer edge
- Die-cut pattern provides 50% more contact points between media pack and frame
- Integral die-cut cross members provide strength and rigidity
- 4" models use die-cut finger separators to stabilize each pleat
- Water repellent adhesive used to bond frame with media pack
- Rust-resistant, expanded metal support grid made of galvanized steel
- 100% water repellent, high-strength adhesive coats entire interior of frame
- Pleat tips of media pack bonded to diagonal support members

Pleat Consistency:


Airguard uses sophisticated production control techniques to ensure consistent pleat count, height, shape, and spacing. This uniform spacing contributes to a better-performing pleat with low pressure drop, full depth dust loading, and longer service life.

Durability:

Because of moisture resistant media and construction, the pleats hold together even when wet, preventing delaminating, excessive buckling, collapsing, racking, warping, and bending. Additionally, the galvanized steel metal grid resists rust, maintains pleat shape, and prevents fluttering in even the most rugged conditions.

Compare:

Compare the performance and value of DP pleats to other types of filters, including disposable panels, ring panels, pads and frames, and permanent filters. The DP line has significantly lower initial resistance levels to aid in your energy savings initiatives, and it also outperforms the alternatives in efficiency, dust holding capacity, durability, and price.

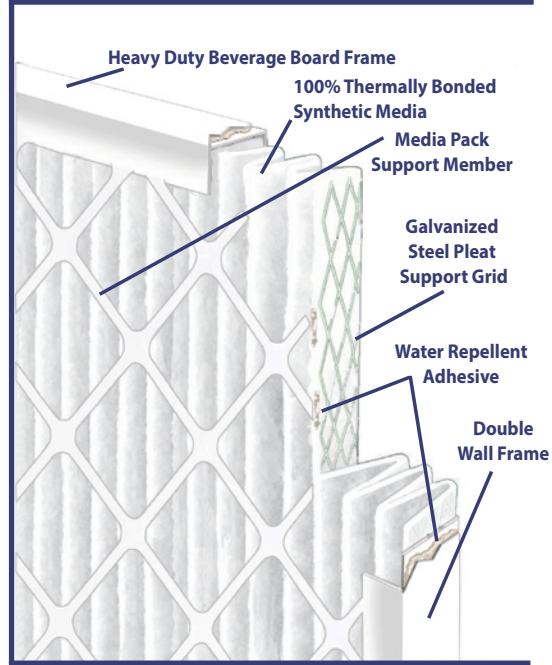

All DP filters are designed with a consistent pleat shape on predetermined centers causing dirt to collect evenly over the entire surface of the media. Fully utilizing every square inch of media results in a slow, steady rise in resistance for maximum dust holding capacity.

DP® / DP Max

Extended Surface Pleated Filters

| NOMINAL SIZE (2) | ACTUAL SIZE | AIRFLOW 300 FPM | AIRFLOW 500 FPM | AIRFLOW 625 FPM | INITIAL RESISTANCE DP | INITIAL RESISTANCE DP MAX | MEDIA AREA DP | MEDIA AREA DP MAX |
|------------------|-------------------------|--------------------|--------------------|--------------------|-----------------------------|---------------------------------|------------------|----------------------|
| 10x10x1 | 9-1/2 x 9-1/2 x 3/4 | 210 | 350 | N/R | 0.14 | 0.16 | 1.6 | 1.5 |
| 10x20x1 | 9-1/2 x 19-1/2 x 3/4 | 415 | 700 | N/R | 0.14 | 0.16 | 2.6 | 2.4 |
| 10x24x1 | 9-3/8 x 23-3/8 x 3/4 | 500 | 830 | N/R | 0.14 | 0.16 | 3.1 | 2.9 |
| 12x12x1 | 11-3/4 x 11-3/4 x 3/4 | 300 | 500 | N/R | 0.14 | 0.16 | 1.9 | 1.8 |
| 12x16x1 | 11-1/2 x 15-3/4 x 3/4 | 400 | 670 | N/R | 0.14 | 0.16 | 2.5 | 2.3 |
| 12x20x1 | 11-1/2 x 19-1/2 x 3/4 | 500 | 830 | N/R | 0.14 | 0.16 | 3.1 | 2.9 |
| 12x24x1 | 11-3/8 x 23-3/8 x 3/4 | 600 | 1000 | N/R | 0.14 | 0.16 | 3.7 | 3.4 |
| 14x14x1 | 13-3/4 x 13-3/4 x 3/4 | 410 | 680 | N/R | 0.14 | 0.16 | 2.7 | 2.4 |
| 14x20x1 | 13-1/2 x 19-1/2 x 3/4 | 585 | 980 | N/R | 0.14 | 0.16 | 3.8 | 3.4 |
| 14x24x1 | 13-3/8 x 23-3/8 x 3/4 | 700 | 1170 | N/R | 0.14 | 0.16 | 4.6 | 4.0 |
| 14x25x1 | 13-1/2 x 24-1/2 x 3/4 | 730 | 1220 | N/R | 0.14 | 0.16 | 4.8 | 4.2 |
| 14x30x1* | 13-3/4 x 29-3/4 x 3/4 | 875 | 1460 | N/R | 0.14 | 0.16 | 5.7 | 5.0 |
| 15x20x1 | 14-1/2 x 19-1/2 x 3/4 | 625 | 1050 | N/R | 0.14 | 0.16 | 4.0 | 3.6 |
| 15x30x1* | 14-3/4 x 29-3/4 x 3/4 | 935 | 1560 | N/R | 0.14 | 0.16 | 6.1 | 5.4 |
| 16x16x1 | 15-1/2 x 15-1/2 x 3/4 | 530 | 890 | N/R | 0.14 | 0.16 | 4.0 | 3.1 |
| 16x20x1 | 15-1/2 x 19-1/2 x 3/4 | 665 | 1110 | N/R | 0.14 | 0.16 | 4.3 | 3.8 |
| 16x24x1 | 15-3/4 x 23-3/8 x 3/4 | 800 | 1330 | N/R | 0.14 | 0.16 | 5.1 | 4.6 |
| 16x25x1 | 15-1/2 x 24-1/2 x 3/4 | 835 | 1400 | N/R | 0.14 | 0.16 | 5.3 | 4.8 |
| 16x30x1* | 15-3/4 x 29-3/4 x 3/4 | 1000 | 1670 | N/R | 0.14 | 0.16 | 6.5 | 5.8 |
| 18x18x1 | 17-3/4 x 17-3/4 x 3/4 | 675 | 1125 | N/R | 0.14 | 0.16 | 4.3 | 3.7 |
| 18x20x1 | 17-3/8 x 19-1/2 x 3/4 | 750 | 1250 | N/R | 0.14 | 0.16 | 4.8 | 4.0 |
| 18x22x1 | 17-3/8 x 21-1/2 x 3/4 | 825 | 1375 | N/R | 0.14 | 0.16 | 5.7 | 4.8 |
| 18x24x1 | 17-3/8 x 23-3/8 x 3/4 | 900 | 1500 | N/R | 0.14 | 0.16 | 5.7 | 4.8 |
| 18x25x1 | 17-1/2 x 24-1/2 x 3/4 | 935 | 1560 | N/R | 0.14 | 0.16 | 6.0 | 5.1 |
| 20x20x1 | 19-1/2 x 19-1/2 x 3/4 | 830 | 1400 | N/R | 0.14 | 0.16 | 5.5 | 4.8 |
| 20x22x1 | 19-3/4 x 21-3/4 x 3/4 | 915 | 1525 | N/R | 0.14 | 0.16 | 6.6 | 5.7 |
| 20x24x1 | 19-3/8 x 23-3/8 x 3/4 | 1000 | 1670 | N/R | 0.14 | 0.16 | 6.6 | 5.7 |
| 20x25x1 | 19-1/2 x 24-1/2 x 3/4 | 1040 | 1730 | N/R | 0.14 | 0.16 | 6.9 | 6.0 |
| 20x30x1* | 19-1/2 x 29-1/2 x 3/4 | 1250 | 2170 | N/R | 0.14 | 0.16 | 8.1 | 7.2 |
| 22x22x1 | 21-3/4 x 21-3/4 x 3/4 | 1005 | 2080 | N/R | 0.14 | 0.16 | 7.1 | 5.0 |
| 24x24x1 | 23-3/8 x 23-3/8 x 3/4 | 1200 | 2000 | N/R | 0.14 | 0.16 | 7.7 | 6.6 |
| 24x30x1 | 23-3/4 x 29-3/4 x 3/4 | 1500 | 2500 | N/R | 0.14 | 0.16 | 9.7 | 8.5 |
| 25x25x1 | 24-1/2 x 24-1/2 x 3/4 | 1300 | 2170 | N/R | 0.14 | 0.16 | 8.7 | 7.5 |
| 10x20x2 | 9-1/2 x 19-1/2 x 1-3/4 | 415 | 700 | 870 | 0.19 | 0.21 | 6.2 | 4.1 |
| 12x12x2 | 11-3/4 x 11-3/4 x 1-3/4 | 300 | 500 | 625 | 0.19 | 0.21 | 4.4 | 3.1 |
| 12x20x2 | 11-1/2 x 19-1/2 x 1-3/4 | 500 | 840 | 1040 | 0.19 | 0.21 | 7.2 | 5.2 |
| 12x24x2 | 11-3/8 x 23-3/8 x 1-3/4 | 600 | 1000 | 1250 | 0.19 | 0.21 | 8.6 | 6.2 |
| 14x20x2 | 13-1/2 x 19-1/2 x 1-3/4 | 585 | 980 | 1220 | 0.19 | 0.21 | 8.8 | 5.7 |
| 14x25x2 | 13-1/2 x 24-1/2 x 1-3/4 | 730 | 1220 | 1520 | 0.19 | 0.21 | 11.0 | 7.1 |
| 15x20x2 | 14-1/2 x 19-1/2 x 1-3/4 | 625 | 1050 | 1300 | 0.19 | 0.21 | 9.3 | 6.2 |
| 16x16x2 | 15-3/4 x 15-3/4 x 1-3/4 | 530 | 890 | 1110 | 0.19 | 0.21 | 9.8 | 6.7 |
| 16x20x2 | 15-1/2 x 19-1/2 x 1-3/4 | 665 | 1120 | 1400 | 0.19 | 0.21 | 9.8 | 6.7 |
| 16x24x2 | 15-3/8 x 23-3/8 x 1-3/4 | 800 | 1340 | 1670 | 0.19 | 0.21 | 11.7 | 8.0 |
| 16x25x2 | 15-1/2 x 24-1/2 x 1-3/4 | 835 | 1400 | 1740 | 0.19 | 0.21 | 11.7 | 8.0 |
| 18x18x2 | 17-3/4 x 17-3/4 x 1-3/4 | 675 | 1125 | 1410 | 0.19 | 0.21 | 10.3 | 7.0 |
| 18x20x2 | 17-1/2 x 19-1/2 x 1-3/4 | 750 | 1250 | 1560 | 0.19 | 0.21 | 11.3 | 7.7 |
| 18x22x2 | 17-1/2 x 21-1/2 x 1-3/4 | 825 | 1375 | 1720 | 0.19 | 0.21 | 13.6 | 9.3 |
| 18x24x2 | 17-3/8 x 23-3/8 x 1-3/4 | 900 | 1500 | 1875 | 0.19 | 0.21 | 13.6 | 9.3 |
| 18x25x2 | 17-1/2 x 24-1/2 x 1-3/4 | 935 | 1570 | 1950 | 0.19 | 0.21 | 14.2 | 9.7 |
| 20x20x2 | 19-1/2 x 19-1/2 x 1-3/4 | 830 | 1400 | 1740 | 0.19 | 0.21 | 12.4 | 8.3 |
| 20x24x2 | 19-3/8 x 23-3/8 x 1-3/4 | 1000 | 1670 | 2080 | 0.19 | 0.21 | 14.8 | 9.9 |
| 20x25x2 | 19-1/2 x 24-1/2 x 1-3/4 | 1040 | 1750 | 2170 | 0.19 | 0.21 | 15.5 | 10.3 |
| 20x30x2* | 19-1/2 x 29-1/2 x 1-3/4 | 1250 | 2085 | 2600 | 0.19 | 0.21 | 18.6 | 12.9 |
| 24x24x2 | 23-3/8 x 23-3/8 x 1-3/4 | 1200 | 2000 | 2500 | 0.19 | 0.21 | 17.9 | 11.7 |
| 25x25x2 | 24-1/2 x 24-1/2 x 1-3/4 | 1300 | 2170 | 2710 | 0.19 | 0.21 | 20.0 | 12.9 |
| 12x24x4 | 11 3/8 x 23 3/8 x 3-3/4 | 600 | 1000 | 1250 | 0.17 | 0.19 | 12.4 | 11.2 |
| 16x20x4 | 15 1/2 x 19 1/2 x 3-3/4 | 665 | 1120 | 1400 | 0.17 | 0.19 | 14.5 | 12.5 |
| 16x25x4 | 15 1/2 x 24 1/2 x 3-3/4 | 835 | 1400 | 1740 | 0.17 | 0.19 | 18.3 | 15.6 |
| 18x24x4 | 17 3/8 x 23 3/8 x 3-3/4 | 900 | 1500 | 1875 | 0.17 | 0.19 | 19.9 | 16.2 |
| 20x20x4 | 19 1/2 x 19 1/2 x 3-3/4 | 830 | 1400 | 1740 | 0.17 | 0.19 | 18.7 | 15.6 |
| 20x24x4 | 19 3/8 x 23 3/8 x 3-3/4 | 1000 | 1670 | 2080 | 0.17 | 0.19 | 22.4 | 18.7 |
| 20x25x4 | 19 1/2 x 24 1/2 x 3-3/4 | 1040 | 1750 | 2170 | 0.17 | 0.19 | 23.5 | 19.6 |
| 24x24x4 | 23 3/8 x 23 3/8 x 3-3/4 | 1200 | 2000 | 2500 | 0.17 | 0.19 | 27.4 | 22.4 |
| 25x29x4* | 24-1/2 x 28-1/2 x 3-3/4 | 1280 | 2430 | 2660 | 0.17 | 0.19 | 32.6 | 26.1 |
| 28x30x4* | 27-1/2 x 29-1/2 x 3-3/4 | 1750 | 2920 | 3640 | 0.17 | 0.19 | 38.5 | 31.1 |
| 12x24x6 | 11 3/8 x 23 3/8 x 5 7/8 | 600 | 1000 | 1250 | - | 0.18 | - | 16.9 |
| 16x20x6 | 15 1/2 x 19 1/2 x 5 7/8 | 665 | 1120 | 1400 | - | 0.18 | - | 18.9 |
| 16x25x6 | 15 1/2 x 24 1/2 x 5 7/8 | 835 | 1400 | 1740 | - | 0.18 | - | 23.6 |
| 18x24x6 | 17 3/8 x 23 3/8 x 5 7/8 | 900 | 1500 | 1875 | - | 0.18 | - | 26.3 |
| 20x20x6 | 19 1/2 x 19 1/2 x 5 7/8 | 830 | 1400 | 1740 | - | 0.18 | - | 23.7 |
| 20x24x6 | 19 3/8 x 23 3/8 x 5 7/8 | 1000 | 1670 | 2080 | - | 0.18 | - | 28.2 |
| 20x25x6 | 19 1/2 x 24 1/2 x 5 7/8 | 1040 | 1750 | 2170 | - | 0.18 | - | 29.5 |
| 24x24x6 | 23 3/8 x 23 3/8 x 5 7/8 | 1200 | 2000 | 2500 | - | 0.18 | - | 33.8 |

* Reverse Pleat

1. DP / DP Max are MERV 8-A, tested per ASHRAE standard 52.2-2012 Appendix J. Test data based on 295 FPM for 24x24x1 and 492 FPM for 24x24x2 and 24x24x4 nominal sizes.

2. Filters may be installed with the pleats either vertical (preferred) or horizontal.


3. 6" deep sizes are available in DP Max models only.

DP® / DP Max

Extended Surface Pleated Filters



Value-Added Summary:

- Synthetic media does not support microbial growth
- Low pressure drop with high dust holding
- Mechanical efficiency
- Durable and damage resistant construction
- Engineered and designed for high strength and rigidity
- Pleat consistency maximizes performance
- Water and moisture resistant media, frame, and adhesive
- Proudly made in the USA

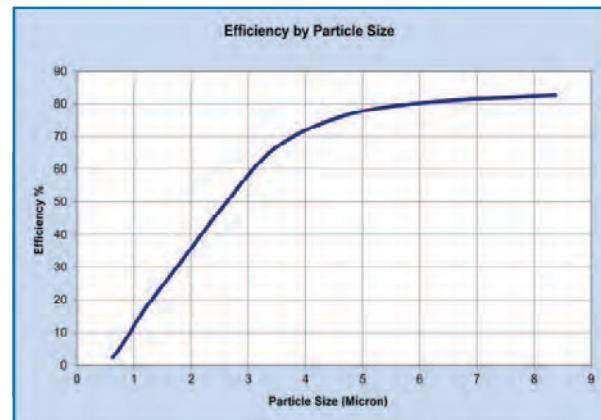

Applications:

- Virtually any application or air handling system
- Built-up filter banks, central station air handlers, rooftop units, side access housings
- Final filters for MERV 8 requirements
- Pre-filters in multi-stage systems

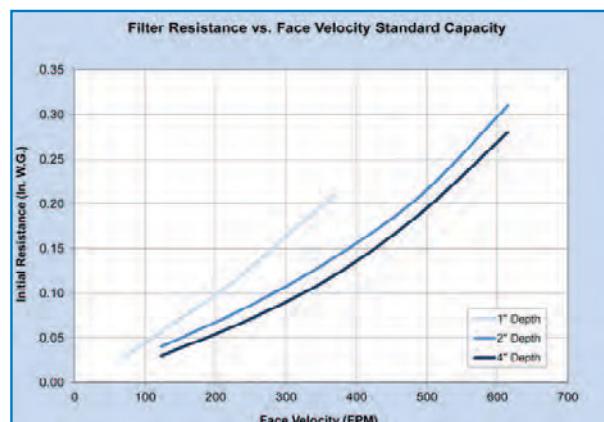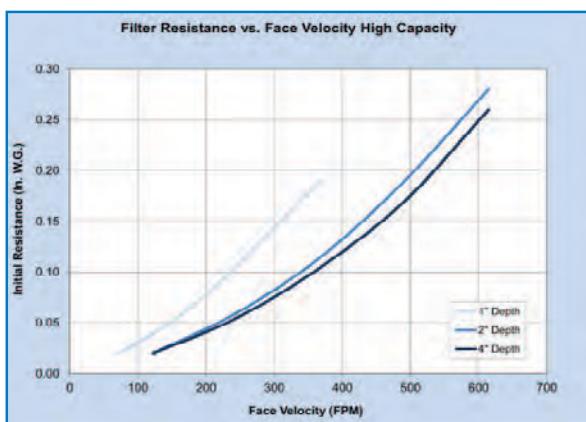

| | | | | |
|-------------------|------|------|------|-----|
| Pleat Count - | 1" | 2" | 4" | 6" |
| (Pleats per foot) | | | | |
| DP - | 14.0 | 15.0 | 11.0 | - |
| DP Max - | 12.0 | 10.0 | 9.0 | 9.0 |

Underwriters Laboratories, Inc. Classification:
DP and DP Max filters are classified per UL Standard 900 for flammability.

Operating Temperature Limit: Maximum operating temperature is 225°F (107°C).



© 2019 Parker Hannifin Corporation

WARNING: This product can expose you to chemicals, including acetaldehyde, antimony oxide, which are known to the State of California to cause cancer, and lead, methanol, which are known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

A-DP 6/19

Parker Hannifin Corporation
HVAC Filtration Division
100 River Ridge Circle
Jeffersonville, Indiana 47130
phone 866 247 4827
www.parker.com/HVAC



ENGINEERING YOUR SUCCESS.