


# Mem-PLEAT E & Pur-MAXX E

Pleated Polyethersulfone Membrane

- ▶ LIQUID CLARIFICATION
- ▶ GENERAL-USE WATER FILTRATION
- ▶ CHEMICAL FILTRATION
- ▶ DEIONIZED WATER SYSTEMS

### ORDER GUIDE



Strainrite's **Pleated Polyethersulfone Membrane Cartridges** were developed for the filtration of process fluids that require a high degree of particle retention and/or constant bacterial barrier for effective sterilization.

Hydrophilic asymmetric polyethersulfone membrane ensures excellent flow rates, broad chemical compatibility, low protein binding, low extractability, high mechanical strength, and temperature resistance in a variety of applications for the biopharmaceutical, microelectronics, chemical, food and beverage industries.

These cartridges meet USP Biological Reactivity Test, in vivo for class VI-121°C plastics. Sterilizable using industry recognized and accepted methods.

The Pur-MAXX E now offers a Special Pleat option, which provides expected surface area improvements of as much as 25%. This optimized pleat geometry option was developed for the filtration of process fluids that require a high degree of particle retention and/or constant bacterial barrier for effective sterilization.



- ▶ HIGH SURFACE AREA MEMBRANE OFFERS EXCELLENT LIFE AND FLUX RATES, WHILE PROVIDING ABSOLUTE-RATED FILTRATION
- ▶ ABSOLUTE-RATED MEMBRANE PROVIDES RELIABLE, CONSISTENT AND REPEATABLE FILTRATE QUALITY
- ▶ LOW PRESSURE DROPS YIELD HIGHER FLOW RATES AND REDUCED PROCESSING TIME
- ▶ INTEGRITY TESTED
- ▶ THERMALLY BONDED CONSTRUCTION WITHOUT THE USE OF ADHESIVES OR BINDERS, RESULTING IN LOWER EXTRACTABLES
- ▶ HIGH STRENGTH DESIGN ALLOWING FOR EXTENDED USE AND MULTI-AUTOClave CYCLES
- ▶ ALL MATERIALS OF CONSTRUCTION ARE FDA COMPLIANT WITH CFR TITLE 21, PHARMACEUTICAL GRADES ARE BIO-SAFE IN ACCORDANCE WITH USP CLASS VI
- ▶ NON FIBER-SHEDDING POLYESTER AND POLYPROPYLENE SUPPORT MATERIALS ELIMINATE FIBER MIGRATION
- ▶ PLEAT DESIGN FOR GREATER SURFACE AREA, ENSURING LONGER SERVICE LIFE, FEWER CHANGE OUTS AND REDUCED OPERATING COSTS PER ELEMENT
- ▶ PHARMACEUTICAL GRADE ELEMENTS ARE 100% INTEGRITY TESTED


#### SPECIAL PLEAT OPTION:

- ▶ OPTIMIZED PLEAT GEOMETRY
- ▶ EXPECTED SURFACE AREA IMPROVEMENTS OF AS MUCH AS 25%

#### NEED A VESSEL FOR YOUR CARTRIDGES?

For the Mem-Pleat E and Pur-MAXX E, the following vessel types are most commonly used:  
 SRCT—PAGE 126      SRC—PAGE 128  
 As always, discuss your options with your local sales representative to find the best fit for your application.

ABSOLUTE RATED RETENTION			
0.04, 0.1, 0.2, 0.45, 0.65, 0.8, 1.2			
MAXIMUM DIFFERENTIAL PRESSURE			
Forward: 75 psid (5.1 bar) @ 75°F (24°C) 40 psid (2.8 bar) @ 180°F (82°C)		Reverse: 50 psid (3.4 bar) @ 75°F (24°C)	
MAXIMUM OPERATING TEMPERATURE			
180°F (82°C) Continuous Duty Polypropylene		275°F (135°C) Continuous Duty Polyester	
TOXICITY			
Cartridge materials meet USP Class VI and CFR 21 for food and beverage contact			
STERILIZATION			
Cartridge can be sterilized via steam or Autoclave: 20 times at 275°F (135°C) Cartridge may be sanitized in place with common sanitizing agents, contact factory for chemical compatibility			
PACKAGING ECONOMY			
Bulk packaging in case quantities to reduce material disposal: 5 inch - 48 per carton   10 inch - 24 per carton   20 inch - 12 per carton   30 inch - 12 per carton   40 inch - 9 per carton			
FILTER MEDIA	END CAPS	PLEAT SUPPORT MATERIAL	CAGE/CORE
Polyethersulfone	Polypropylene Polyester	Polypropylene Polyester	Polypropylene Polyester
SEALS			
Buna N   Fluorocarbon   EPDM   Silicone   FEP Encapsulated Fluorocarbon   FEP Encapsulated Silicone   PTFE Foam   PTFE Hard			
CONSTRUCTION METHOD			
Thermal Bond			
OUTSIDE DIAMETER		APPROXIMATE SURFACE AREA	
MPE: 2.55" (6.48cm)   PRMXE: 2.7" (6.87cm)		6.8 square feet per 10" equivalent	
LENGTHS			
5 inch (12.7 cm)   10 inch (25.4 cm)   20 inch (50.8 cm)   30 inch (76.2 cm)   40 inch (102 cm)			

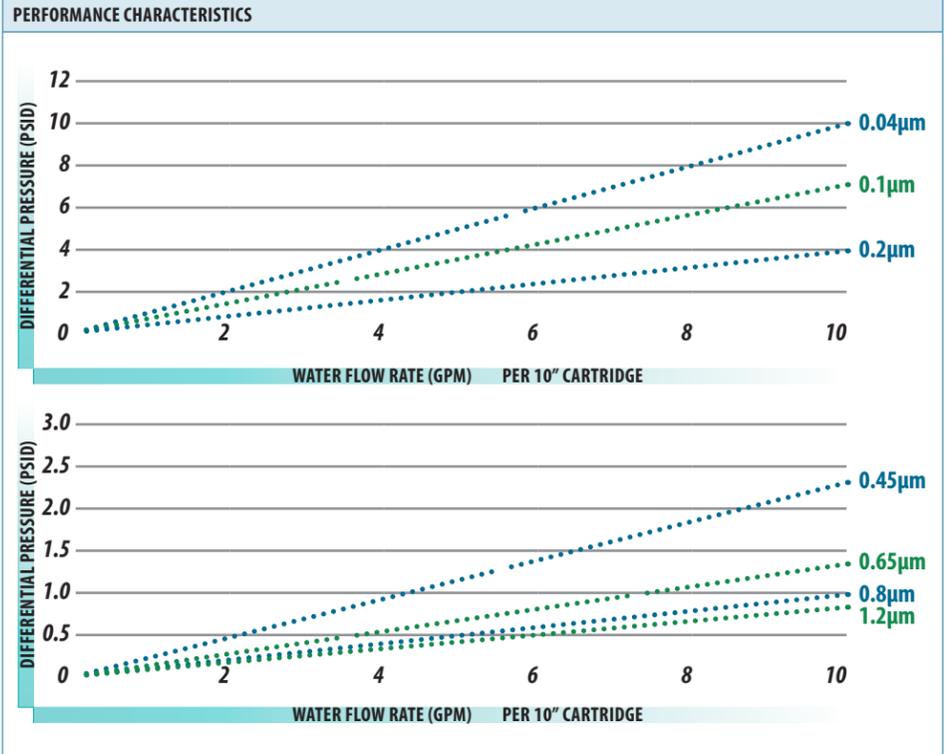

### ORDER OPTIONS

CARTRIDGE	
MPE PRMXE	Mem-Pleat E (2.55") Pur-MAXX E (2.7")
MICRON RATINGS	
0.04, 0.1, 0.2, 0.45, 0.65, 0.8, 1.2	
CARTRIDGE LENGTH	
5, 10, 20, 30, 40	
PLEAT SUPPORT	
PP PE	Polypropylene Polyester
END CAP CONFIGURATIONS	
C1	Double Open Ends
C2	213/Recessed Cup
C3	Flat/222
C4	Single Open End/Flat
C5	Recessed Cup/222
C6	Flat/226
C7	Fin/226
C8	Fin/222
GASKET / O-RING MATERIAL	
S	Silicone
B	Buna N
V	Fluorocarbon
E	EPDM
TF	PTFE Foam
TH	PTFE Hard
TV	Encapsulated Fluorocarbon
TS	Encapsulated Silicone
CARTRIDGE GRADE	
-	General
1	FDA Grade
2	Pharmaceutical
5	Water
CARTRIDGE OPTIONS	
I DIF APH	316 SS Insert DI Flush All Polyester Hardware
SPECIAL PLEAT OPTION	
SP	Special Pleat (PRMXE only)